




South Area Street Improvements

Ongoing Through Early 2019

Legend

- Slurry Seal
- Micro-Surfacing
- 2" AC Overlay
- 4" AC Reconstruct
- Concrete Street Repairs
- Slurry Seal & Concrete Street Repairs

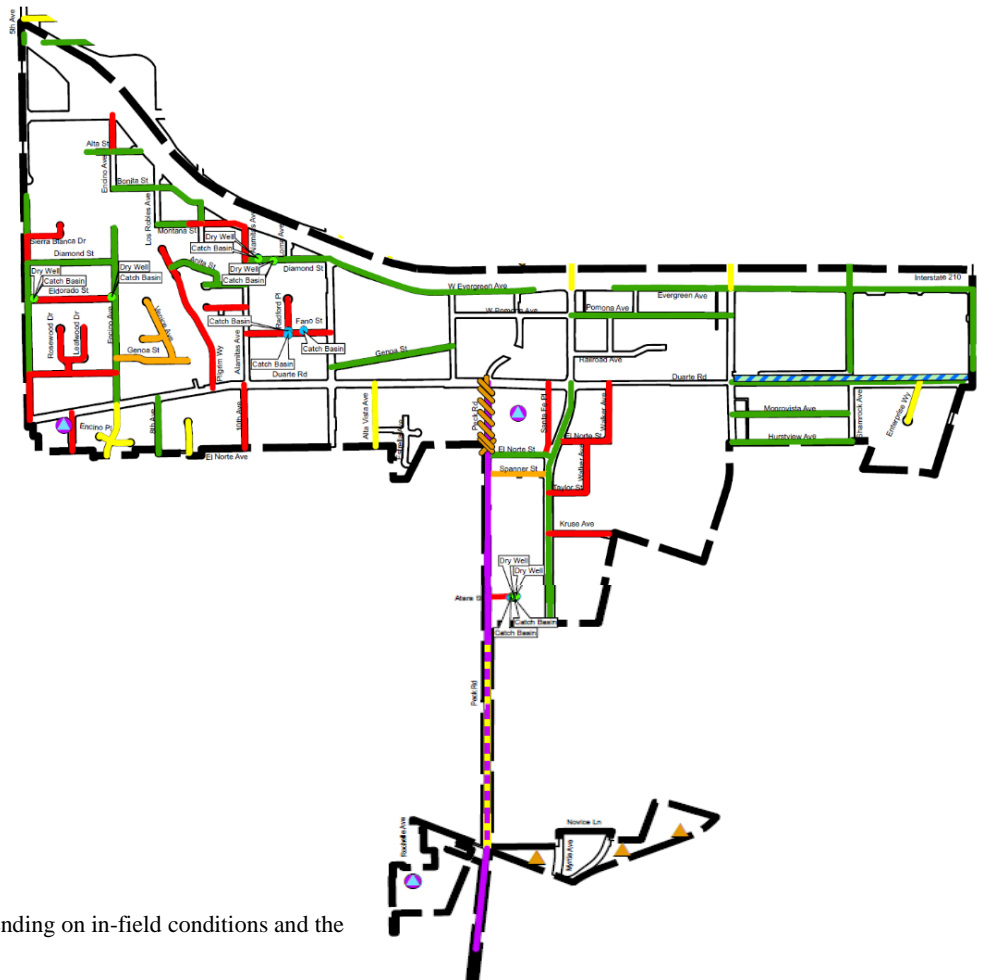

*Note that details are subject to change depending on in-field conditions and the contractors' assessment.

Treatment	Color on Map	What is it?*	What's the impact?*
Slurry Seal	Yellow	Seal coat added to the existing roadway to preserve it.	Full working day to lay and allow to dry/cure – Road closed while drying
Micro-Surfacing	Orange	Thin, smooth top coat with extra additives added to prevent damage from worsening, and for increased durability and cure time	Full working day to lay and allow to dry/cure – Road closed while drying
Mill & Overlay	Green	Removes and replaces top 2 inches of asphalt – Creating a new roadway surface	<u>Intermittent road closures for 2-3 weeks</u> , can drive on rough bottom layer, restricted parking
Reconstruction	Red	Reconstruction of roadway base and surface	Road surface returns to dirt and graded, asphalt installed in 2 stages, intermittent road closures for 3 weeks, restricted parking